

Overall Dimensions and performance parameters of DCL-Ex10/20 Explosion proof Type

Explosion-proof standard type

Explosion-proof Direct Installation Type

Type Performance Parameters	DCL—Ex10				DCL—Ex20					
	AC24V	AC110V	AC380V	AC220V	AC110V	AC380V	AC220V			
Motor Power	25W	25W	15W	25W	25W	15W	25W			
Rated Current	2.12A	0.57A	0.10A	0.30A	0.63A	0.10A	0.35A			
Standard Time/Torque	30S/100Nm				30S/200Nm					
Optional Time/Torque	15S/50Nm			15S/50Nm 60S/100Nm	15S/100Nm		15S/100Nm 60S/200Nm			
Turning Angle	0 ~ 90° Adjustable									
Available Control Circuit	Types of A、B、C、D、E、F、H									
Total Weight	5.0kg				5.5kg					
Insulating Resistance	AC24V: 100MΩ/250VDC AC110V/AC220V/AC380V: 100 MΩ/500VDC									
Withstand Voltage Class	AC24V: 500VAC 1minutes、AC110V/AC220V:1500VAC 1minutes、AC380V:1800VAC 1minutes									
Protection Class	IP67									
Explosive-proof grade	Exd II BT4									
Installation Angle	360° at any angle									
Electric Interface	2-G1/2 explosion-proof plug ,clients should install corresponding explosion-proof cable connector when using according to the cable selected.									
Ambient Temperature	-20℃ ~ +60℃									
Optional Function	◆Over-torque Protector ◆Heater for eliminating moisture									




Explosion-proof standard type



Explosion-proof Direct Installation Type

Explosion-proof standard type

Explosion-proof Direct Installation Type

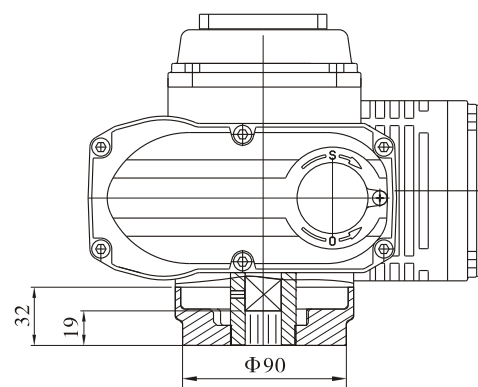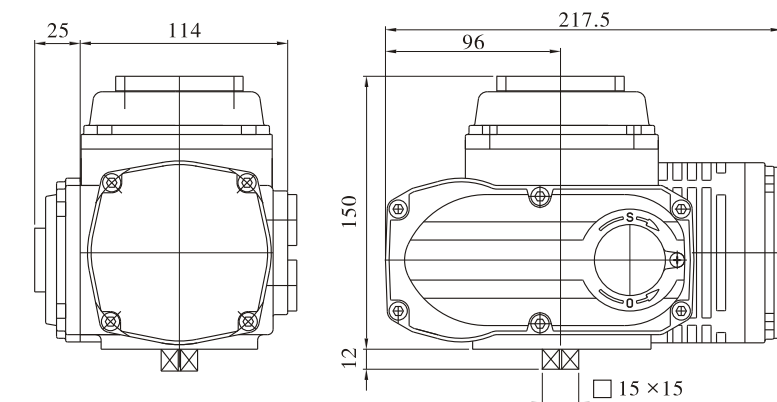

Parameters for direct installation		
	Ex10	Ex20
Square	□9×9 □14×14 □17×17	□14×14 □17×17
Flange	F05 F07	
Valve stem	Height ≤ 19mm	

